

Orona 3G

1025


Machine-room above electrical gearless solutions

With the latest direct drive (gearless) technology. The customised solution with machine-room, maximum flexibility and greatest performance.

General specifications

Load	320 to 1,000 kg
Capacity	4 to 13 persons
Speed	1 - 1.6 m/s
Maximum travel	50 - 60 m
Maximum floors served	16 - 21 floors
Entrances	1 front / 2 open through
Drive system	Direct gearless
Controller	ARCA III controller, low energy consumption multiprocessor
Door types	Automatic side-opening / Automatic central-opening
Clear door opening	From 600 to 1,500 mm (in 100 mm increments)
Door height	2,000 / 2,100 / 2,200 / 2,300 mm
Car dimensions	Parametric car dimensions
Internal car height	2,100 / 2,200 / 2,300 / 2,400 mm
Aesthetic solutions	Domo Reference Packs Domo Selection Packs / Domo Plus

Standard Optional

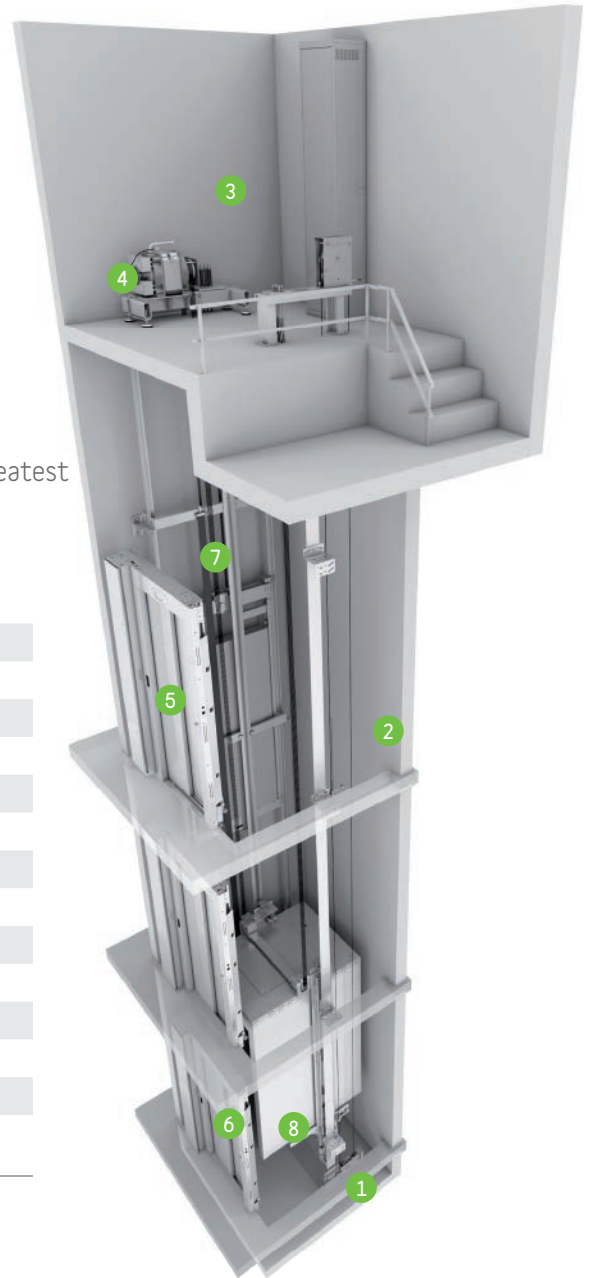

1 ACCESSIBLE SPACE BELLOW THE PIT

Adapts the lift to suit buildings which have an accessible space below the pit (optional).



2 PARAMETRIC/FLEXIBLE

Flexible car and door configurations ensure available shaft dimensions can be optimised (optional).



3 MACHINE-ROOM

A traditional solution simplifying lift maintenance.



4 DRIVE

Compact, quiet, gearless, energy efficient, speed regulated (VVVF) permanent magnet electric motor.



5 DOORS

Compact permanent magnet motor for fast, accurate and quiet door operation giving the most advanced performance. Advanced door opening and full height infra red door protection edges for medium flow situations. Optional Solid Door for high flow situations.



6 AUTOMATIC RESCUE SYSTEM

With floor level indication to ensure fast, efficient and safe evacuation of passengers in the event of an emergency. As an option, the system can incorporate a fully-automatic rescue device to evacuate passengers in the event of a power failure.



7 TRACTION ROPES

Orona small diameter ropes replace traditional steel ropes. As a result of their lighter weight, longer lifespan and greater flexibility, it is possible to use a more compact, efficient and eco-friendly gearless machine.



8 TWO-WAY COMMUNICATIONS

Between the lift and the emergency 24-hour Service Call Centre according to EN 81-28.



Standard dimensions*

Load / capacity			Car			Lift shaft ⁰								
Speed	Persons	Q Load	AC Width	FC Depth	PL Clear opening	Entrances		Side-opening doors		Central-opening doors		HF Pit	HUP ⁴ Headroom	
						Accessibility	No. of entrances	AH Width	FH ¹ Depth	AH Width	FH ² Depth			
1 m/s	6	450 kg	1,000	1,250	800	♿	1	1,470	1,520	1,720	1,470	1,000 (850) ³	3,400	
							2x180 ⁰		1,690		1,590			
	8	630 kg	1,100	1,400	900	♿	1	1,570	1,670	1,900	1,620			
							2x180 ⁰		1,840		1,740			
	10	800 kg	1,350	1,400	900	♿	1	1,820	1,670	1,900	1,620			
							2x180 ⁰		1,840		1,740			
	13	1000 kg	1,000 kg	1,600	1,400	1,000	♿	1	2,070	1,670	2,100			1,620
								2x180 ⁰		1,840				1,740
				1,400	1,600	1,000	♿	1	1,870	1,870	2,100			1,820
								2x180 ⁰		2,040				1,940
				1,100	2,100	1,000	♿	1	1,720	2,370	2,100			2,320
								2x180 ⁰		2,540				2,440
1,6 m/s	6	450 kg	1,000	1,250	800	♿	1	1,470	1,520	1,720	1,470	1,120	3,550	
							2x180 ⁰		1,690		1,590			
	8	630 kg	1,100	1,400	900	♿	1	1,570	1,670	1,900	1,620			
							2x180 ⁰		1,840		1,740			
	10	800 kg	1,350	1,400	900	♿	1	1,820	1,670	1,900	1,620			
							2x180 ⁰		1,840		1,740			
	13	1,000 kg	1,000 kg	1,600	1,400	1,000	♿	1	2,070	1,670	2,100			1,620
								2x180 ⁰		1,840				1,740
				1,400	1,600	1,000	♿	1	1,870	1,870	2,100			1,820
								2x180 ⁰		2,040				1,940
				1,100	2,100	1,000	♿	1	1,720	2,370	2,100			2,320
								2x180 ⁰		2,540				2,440

0 Minimum plumb measurements

- 1 Shaft depth with doors tracks projecting 60 mm on the landing (doors adapted 50 mm towards the lift shaft) (std. doors 90 mm sill)
- 2 Shaft depth with doors tracks projecting 40 mm on the landing (doors adapted 34 mm towards the lift shaft) (std. doors 54 mm sill)


3 HF reduced pit optional 850 mm

4 HUP minimum for internal car height (HC) 2,100 mm (HUP=HC+1,300)

Note: minimum AH dimensions calculated with the most favourable combination of controller cabinet and door pillar it is connected to

* The information is not contractually binding and is subject to the conditions of the shaft

Layout*

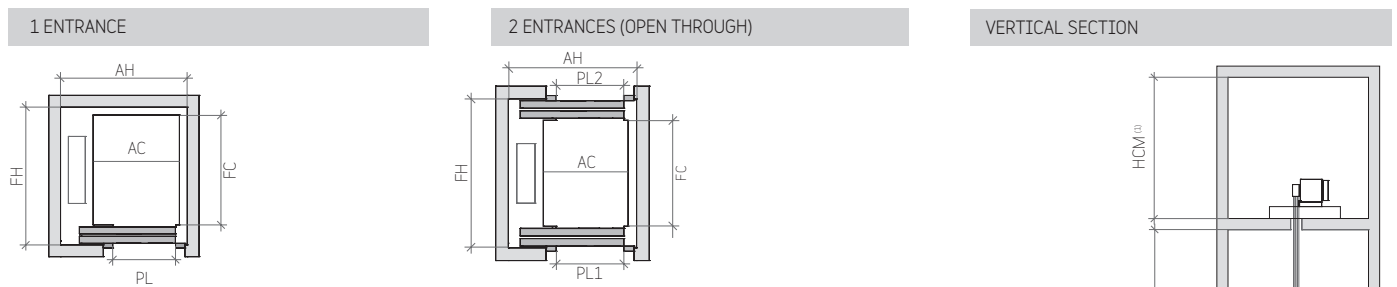

* Note: The diagrams are for guidance only

Customised car dimensions

										Car width																				
										13	12									1,600										
										13	13	11								1,500										
										13	13	12	11	10						1,400										
										13	12	11	10	9	8					1,300										
13	13	13	13	12	11	10	9	8	8	7	6	6				1,200														
13	13	12	11	11	11	10	9	8	8	7	6	5	5			1,100														
12	12	11	10	10	9	8	7	7	6	5	5	4	4			1,000														
11	10	10	9	8	8	7	7	6	5	5	4	4	4			900														
										6	6	5	5	4	4						800									
2,100	2,000	1,900	1,800	1,700	1,600	1,500	1,400	1,300	1,200	1,100	1,000																			

Car depth

Clear door opening

Note:
Car width and depth variable in increments of 5 mm.
For simplification, table samples show increments of 100 mm.